

DIN RAIL FUSE HOLDERS



Features

- + DIN rail mounting
- + 1, 2 & 3 pole with Neutral pole option
- + Blinking LED upon fuse failure
- + Silver plated contact surfaces
- + Internal circuit resistance is 2M ohm.
- + UL512 & UL486E, CE, IEC 60947-1 & IEC 60947-3



Ordering Information & Diagrams

10x38 mm Fuse - 32A, 690V Rated


P/N	Poles	Indicator	Options
2541000	1		
2542000	1		Neutral Pole
2543000	2		
2544000	3		
2545000	3		Neutral Pole
2541100	1	LED	
2542100	1	LED	Neutral Pole
2543100	2	LED	
2544100	3	LED	
2545100	3	LED	Neutral Pole

Additional Neutral Pole increases the width by 8mm
 Dimensions (mm): 81h x 65d x 8w per pole

Class CC 10x38 mm Fuse - 30A, 600V Rated

P/N	Poles	Indicator
2541300	1	
2543300	2	
2544300	3	

Dimensions (mm): 81h x 65d x 8w per pole

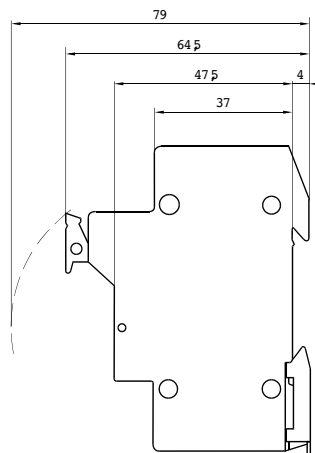

14x51 mm Fuse - 50A, 690V Rated

P/N	Poles	Indicator
2561000	1	
2563000	2	
2564000	3	
2561100	1	LED
2563100	2	LED
2564100	3	LED

Dimensions (mm): 94h x 70d x 8w per pole

