

ENCLOSURE AIR CONDITIONERS

TOP MOUNT A/C




Features

- + 1126 to 17,700 BTU/Hour
- + 1 Phase 115, 230 400 & 460;
3 Phase 400 & 460 VAC
- + Maintenance Free, No Filter Required *
- + Double condensate protection
(most models)
- + Condensate Evaporator on
EHE04 and larger except EHE065/095
- + Electronic thermostat as option
- + Stainless steel or custom color available

* *Maintenance Free: Fin spacing on external heat exchanger is 5mm instead of the industry standard 2mm. This allows dust to flow through the fins and maintains airflow and BTU capacity without the use of filters and the maintenance of changing and cleaning the filters*




Diagrams

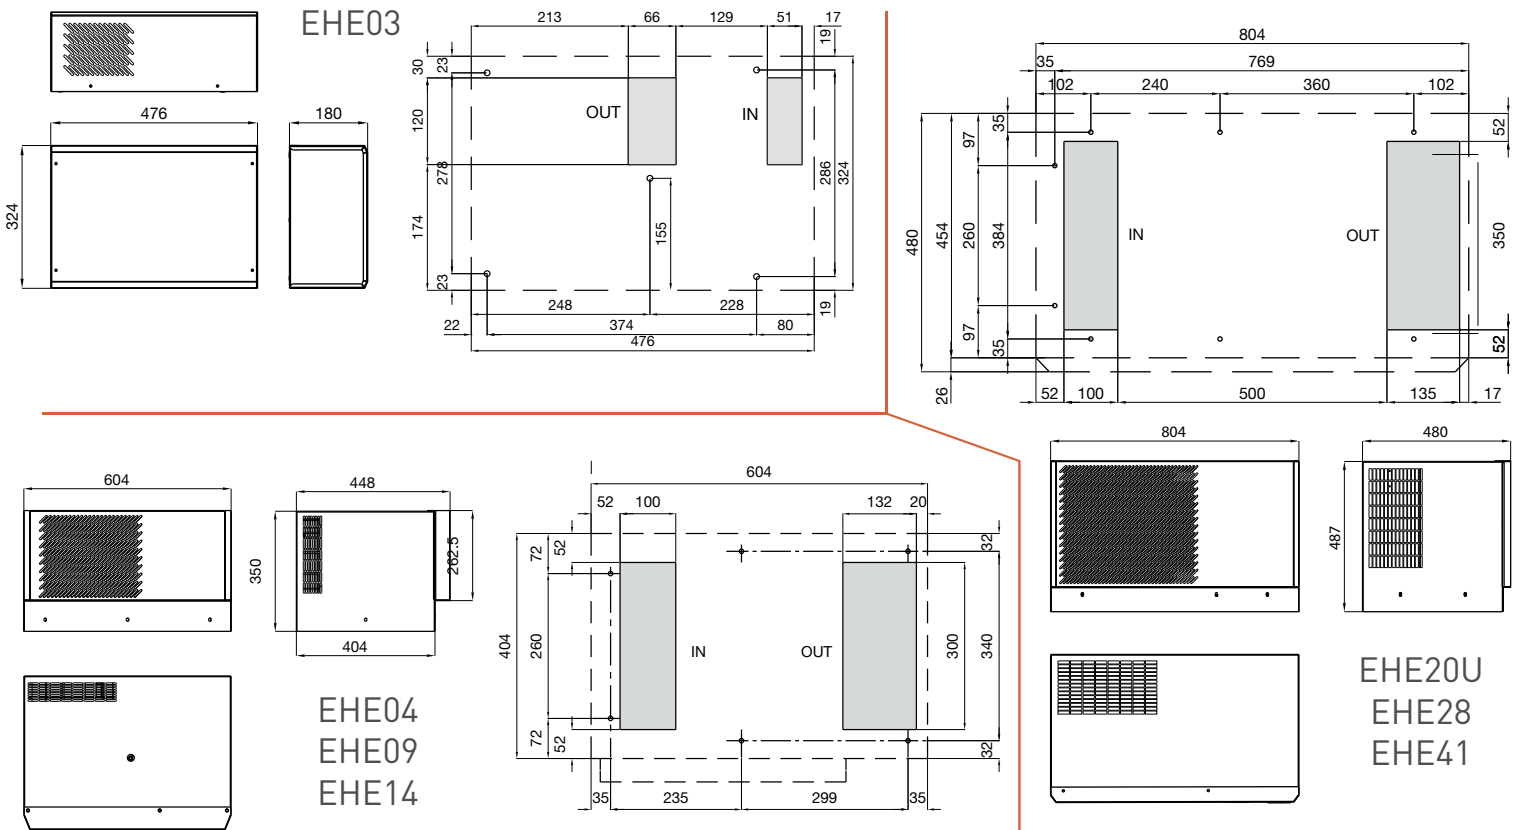


Ordering Information / Top Mount

Model#	UL	Btu/Hr	Watts	Power	Inrush	Run	Dim. (mm)	Wt.
EHE0300203		1126	330	115-1-60	10A	2.8A	200x500x308	38 lb
EHE0300220		1126	330	230-1-50/60	5A	1.4A	200x500x308	38 lb
EHE04U0203	UL	1706	500	115-1-60	18A	4A	323x604x446	90 lb
EHE04U0220	UL	1706	500	230-1-60	9A	1.8A	323x604x446	77 lb
EHE06S0220		2047	600	230-1-50/60	16A	1.8A	330x600x320	66 lb
EHE06S0230		2047	600	400-1-50/60	7.7A	1A	330x600x320	82 lb
EHE09S0220		3071	900	230-1-50/60	15A	2.7A	330x600x320	84 lb
EHE09U0203	UL	3242	950	115-1-60	32A	6A	350x604x448	90 lb
EHE09U0220	UL	3242	950	230-1-60	15A	3A	350x604x448	90 lb
EHE1400220		4777	1400	230-1-50/60	17A	4.3A	350x604x448	99 lb
EHE14U0203	UL	4777	1400	115-1-60	34A	8.9A	350x604x448	95 lb
EHE14U0220	UL	4777	1400	230-1-60	17A	4.3A	350x604x448	95 lb
EHE1400230		4777	1400	400-1-50/60	9.8A	2.9A	350x604x448	117 lb
EHE1400239		4777	1400	460-1-60	9.8A	2.9A	350x604x448	117 lb
EHE2000220		6824	2000	230-1-50/60	22A	5A	371x611x478	97 lb
EHE20U02206000	UL	6824	2000	230-1-60	22A	6.6A	487x804x496	220 lb
EHE2000230		6824	2000	400-1-50/60	13A	2.75A	371x611x478	123 lb
EHE2000239		6824	2000	460-1-60	13A	2.75A	371x611x478	123 lb
EHE2800220		9212	2700	230-1-50/60	38A	8A	487x804x480	178 lb
EHE28U0201	UL	9212	2700	230-1-60	38A	8.8A	487x804x480	178 lb
EHE2800260		9212	2700	400-3-50/60	16A	2.3A	487x804x480	187 lb
EHE2800261		9212	2700	460-3-60	16A	2.3A	487x804x480	187 lb
EHE4100220		12966	3800	230-1-50/60	38A	9A	487x804x480	185 lb
EHE41U0201	UL	12966	3800	230-1-60	38A	8.8A	487x804x480	185 lb
EHE4100260		12966	3800	400-3-50/60	17A	3.8A	487x804x480	189 lb
EHE4100261		12966	3800	460-3-60	17A	3.8A	487x804x480	189 lb
EHE60002216000		17742	5200	400-3-50/60	25A	4.8A	488x908x554	231 lb
EHE60002616000		17742	5200	460-3-60	25A	4.8A	488x908x554	231 lb

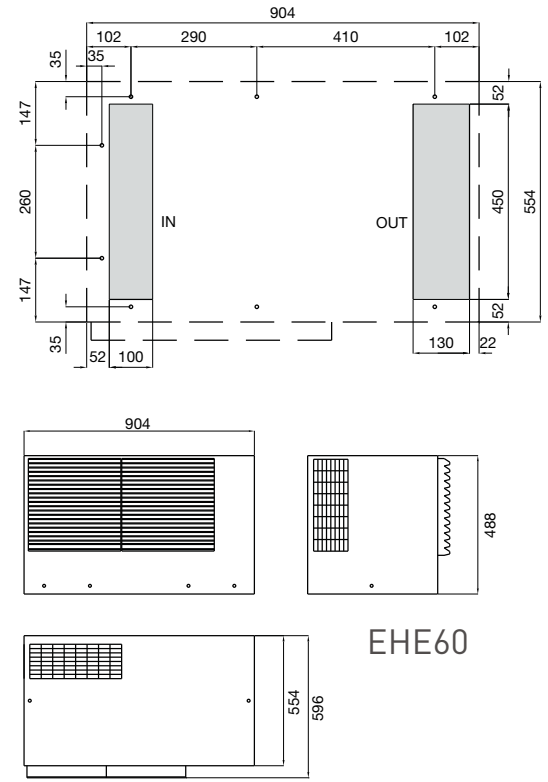

Voltage Tolerance +/-10%

Accessories: Code# 6000 LED Controller Optional 304 stainless steelhousing

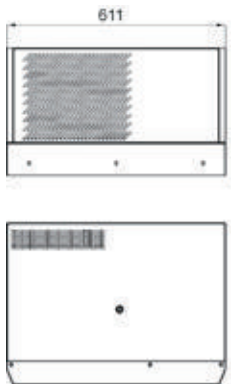

EHE20

