



ENCLOSURE AIR CONDITIONERS

WALL MOUNT



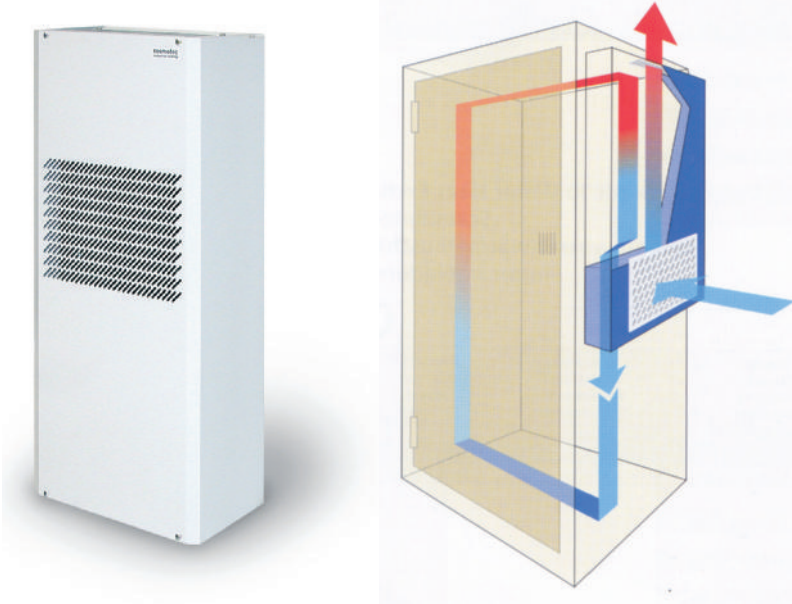


Features



- + 1126 to 13,600 BTU/Hour
 - + 1 Phase 115, 230, 400 & 460;
3 Phase 400 & 460 VAC
 - + Patented Maintenance Free,
No Filter Required *
 - + Condensate Evaporator on
EVE11 and larger
 - + Electronic thermostat is standard
or option by model
 - + Stainless steel or custom color available
 - + UL Approved (some models), CE
 - + Outdoor EVO Models available
2900-13650 BTU/Hr
- * Patented Maintenance Free: Fin spacing on external heat exchanger is 5mm instead of the industry standard 2mm. This allows dust to flow through the fins and maintains airflow and BTU capacity without the use of filters and the maintenance of changing and cleaning the filters.*





EVE03

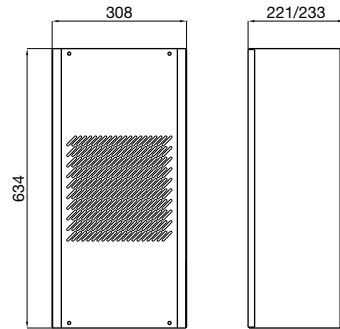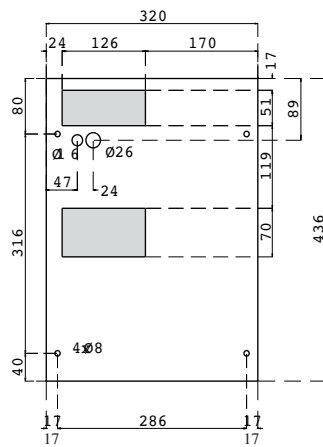


EVE04
EVE08

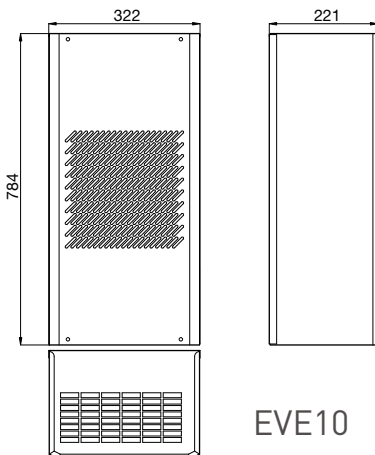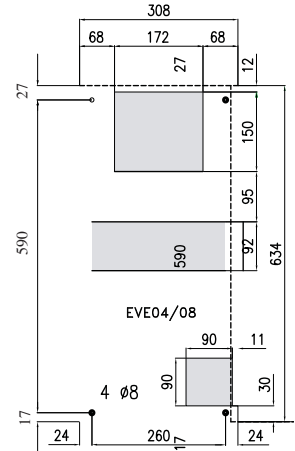

EVE10

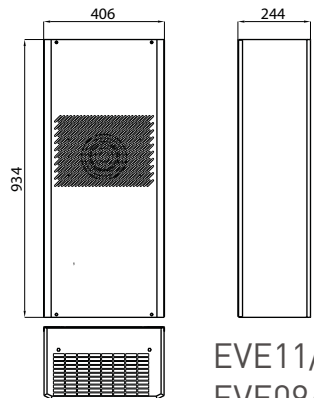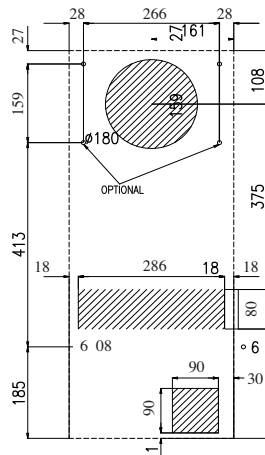


EVE11/20
EVE09/14

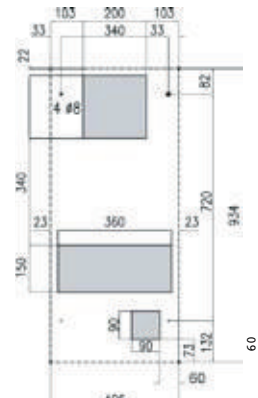


Ordering Information

Model#	UL	Btu/Hr	Watts	Power	Inrush	Run	Dim. (mm)	Wt.
EVE0300203		1126	330	115-1-60	10A	2.8A	436x320x180	40 lb
EVE0300220		1126	330	230-1-50/60	5A	1.4A	436x320x180	38 lb
EVE0400220		1706	500	230-1-50/60	15A	2A	634X308X221	51 lb
EVE04U0203	UL	1706	500	115-1-60	30A	4A	634X308X221	51 lb
EVE04U0220	UL	1706	500	230-1-60	15A	2A	634X308X221	51 lb
EVE0400217		1706	500	400-1-50/60	6A	1A	634x308x233	66 lb
EVE0400209		1706	500	460-1-60	6A	1A	634x308x233	66 lb
EVE0800220		2900	850	230-1-50/60	15A	2.8A	634X308X221	57 lb
EVE08U0203	UL	2900	850	115-1-60	29A	5.2A	634X308X221	57 lb
EVE08U0220	UL	2900	850	230-1-60	12A	2.8A	634X308X221	57 lb
EVE0800217		2900	850	400-1-50/60	9.6A	1.6A	634x308x233	66 lb
EVE0800209		2900	850	460-1-60	9.6A	1.6A	634x308x233	66 lb
EVE1008220		3071	900	230-1-50/60	14.5A	3A	780x322x220	64 lb
EVE09U0203	UL	3242	950	115-1-60	32A	6A	934x406x232	88 lb
EVE1100220		3583	1050	230-1-50/60	16A	2.8A	934x406x244	110 lb
EVE1100230		3583	1050	400-1-50/60	16A	1.6A	934x406x245	114 lb
EVE1100209		3583	1050	460-1-60	16A	1.6A	934x406x245	114 lb
EVE1400220		4777	1400	230-1-50/60	17A	5A	934x406x244	92 lb
EVE14U0203	UL	4777	1400	115-1-60	32A	8.4A	934x406x232	101 lb
EVE14U0220	UL	4777	1400	230-1-60	17A	5A	934x406x232	101 lb
EVE1400230		4777	1400	400-1-50/60	17A	3.3A	934x406x244	110 lb
EVE1400209		4777	1400	460-1-60	17A	3.3A	934x406x244	110 lb
EVE2000220		6824	2000	230-1-50/60	20A	2.5A	934x406x244	158 lb
EVE20U0203	UL	6824	2000	115-1-60	38A	11.5A	934x406x232	97 lb
EVE20U0220	UL	6824	2000	230-1-60	22A	6.2A	934x406x232	97 lb
EVE2000221		6824	2000	400-3-50/60	10A	2.5A	1004x406x244	158 lb
EVE2000260		6824	2000	460-3-60	10A	2.5A	1004x406x244	158 lb
EVE2800220		9212	2700	230-1-50/60	38A	9A	1234x508x375	189 lb
EVE28U0201	UL	9212	2700	230-1-60	38A	9A	1234x508x375	174 lb
EVE2800221		9212	2700	400-3-50/60	16A	3A	1234x508x375	183 lb
EVE2800260		9212	2700	460-3-60	16A	3A	1234x508x375	183 lb
EVE4100220		13648	4000	230-1-50/60	46.5A	9.2A	1234x508x375	178 lb
EVE41U0201	UL	13648	4000	230-1-60	46.5A	9.2A	1234x508x375	183 lb
EVE4100221		13648	4000	400-3-50/60	18A	3.5A	1234x508x375	189 lb
EVE4100260		13648	4000	460-3-60	18A	3.5A	1234x508x375	189 lb

EVE20U

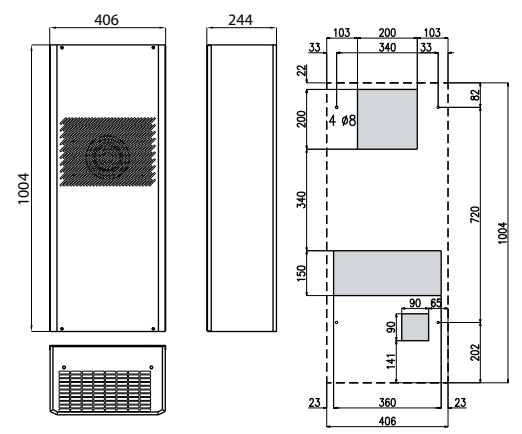

EVE28/EVE41

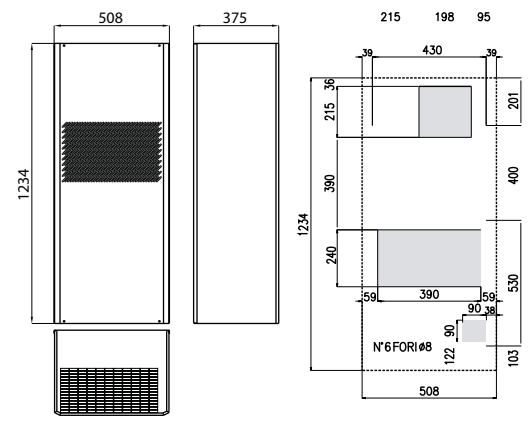

Voltage Tolerance +/-10% Accessories: optional LED Controller optional 304 stainless steel housing Outdoor Wall Mount Air Conditioners - EVO Series available for 2,900-13,648BTU/ Hr.