

DIN RAIL ENCLOSURE HEATERS & THERMOSTATS

FAN HEATERS // Cirrus 25 / 40

Features // Cirrus 25 & 40

- + PTC Technology with self regulating characteristics
- + Rugged Aluminum Extrusion Profile
- + Independent fan circuit to aid in cooling
- + Finger guard on outlet
- + 590-610mm cable for termination
- + Fan Life 120,000 Hrs @ 40° C L10
- + Fan Operating Temperature -10 to +70° C (14 to +158° F)
- + Approvals UL, CSA, CE, VDE, RoHS Protection IP20
- + Optional DIN Rail Transformers FGT300 (12VAC) FGT314 (24VAC)

25 mm DRFH	W@50°F	Heater	Fuse	Fan	Fan Amps	Dimensions
FGC0004.2	10W	12VDC	4A	12VDC	.04A	50X25X27mm
FGC0005.2	20W	12VDC	4A	12VDC	.04A	50X25X27mm
FGC0015.2	5W	24VACDC	4A	24VACDC	.02A	50X25X27mm
FGC0018.2	15W	24VACDC	4A	24VACDC	.02A	50X25X27mm
FGC0501.2	20W	12VDC	4A	12VDC	.04A	72X25X27mm
FGC0502.2	30W	12VDC	4A	12VDC	.04A	72X25X27mm
FGC0503.2	40W	12VDC	6A	12VDC	.04A	72X25X27mm
FGC0505.2	30W	100-240VAC	2A	12VDC	.04A	72X25X27mm
FGC0517.2	40W	12VAC	6A	12VAC	.04A	72X25X27mm
FGC0520.2	40W	100-240VAC	2A	12VAC	.04A	72X25X27mm
FGC0523.2	30W	24VACDC	4A	24VACDC	.02A	72X25X27mm
FGC0524.2	40W	24VACDC	6A	24VACDC	.02A	72X25X27mm
FGC0525.2	20W	100-240VAC	2A	24VACDC	.02A	72X25X27mm
FGC0526.2	30W	100-240VAC	2A	24VACDC	.02A	72X25X27mm
FGC0527.2	40W	100-240VAC	2A	24VACDC	.02A	72X25X27mm





40 mm DRFH	W@50°F	Heater	Fuse	Fan	Fan Amps	Dimensions
FGC1002.2	60W	12VDC	6A	12VDC	.95A	72X40X42mm
FGC1007.2	100W	100-240VAC	4A	12VDC	.95A	72X40X42mm
FGC1021.2	60W	100-240VAC	2A	12VAC	.95A	72X40X42mm
FGC1022.2	80W	100-240VAC	2A	12VAC	.95A	72X40X42mm
FGC1023.2	100W	100-240VAC	4A	12VAC	.95A	72X40X42mm
FGC1025.2	45W	24VACDC	6A	24VACDC	.48A	72X40X42mm
FGC1026.2	60W	24VACDC	6A	24VACDC	.48A	72X40X42mm
FGC1037.2	50W	100-240VAC	2A	24VACDC	.48A	72X40X42mm
FGC1029.2	60W	100-240VAC	2A	24VACDC	.48A	72X40X42mm
FGC1030.2	80W	100-240VAC	2A	24VACDC	.48A	72X40X42mm
FGC1031.2	100W	100-240VAC	4A	24VACDC	.48A	72X40X42mm
FGC1502.2	200W	100-240VAC	4A	12VDC	.95A	107X40X42mm
FGC1510.2	200W	100-240VAC	4A	12VAC	.95A	107X40X42mm
FGC1507.2	230W	100-240VAC	4A	24VDC	.48A	107X40X42mm
FGC1512.2	125W	100-240VAC	4A	24VACDC	.48A	107X40X42mm
FGC1513.2	150W	100-240VAC	4A	24VACDC	.48A	107X40X42mm
FGC1514.2	200W	100-240VAC	4A	24VACDC	.48A	107X40X42mm



/25



/40

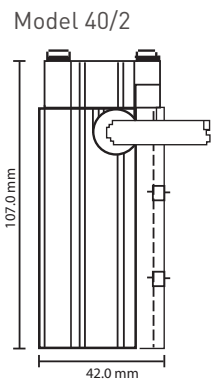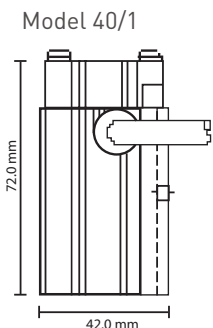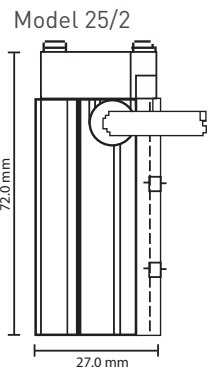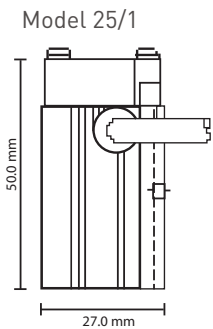

Maintain 50mm safe mounting distance between heater and other objects. Maintain 300mm distance at the hot air outlet. It is recommended to use a thermostat to control the heater. Specifications are subject to change without prior notice.

