

FOOT-MOUNT FAN HEATER

CR 030 | 950 W




- > Compact design
- > Integrated adjustable thermostat or fixed hygrostat

- > Double insulated plastic housing
- > Built-in overheat protection

The compact CR 030 high performance fan heater prevents formation of condensation and provides an evenly distributed interior air temperature in enclosures. This fan heater is available with an integrated thermostat for temperature control or a pre-set hygrostat for humidity control. The CR 030 was designed as a stationary unit for the bottom of the enclosure. For panel or DIN rail mount, the CR 130 fan heater is recommended.




TECHNICAL DATA

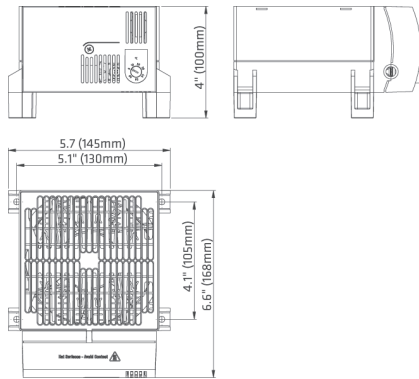

Heating element	high performance cartridge
Overheat protection	with automatic reset and second-tier one shot fuse
Heater body	extruded aluminum
Axial fan, ball bearing	service life 50,000 h at 77 °F (25 °C)
Air flow, free blowing	94 cfm (160 m ³ /h)
Connection	2-pole terminal AWG 16 max. (1.5 mm ²) with strain relief, clamping torque 0.8 Nm max.
Housing	plastic, UL 94V-0, black
Mounting	M5 screws (not included)
Mounting position	horizontal
Operating ¹ / Storage temperature	-49 to +158 °F (-45 to +70 °C)
Operating / Storage humidity	max. 90 %RH (non-condensing)
Dimensions	3.9 x 5.7 x 6.6" (100 x 145 x 168 mm)
Weight	approx. 3.1 lbs. (1.4 kg)
Protection class / Protection type	II (double insulated) / IP20

¹ Operating temperature of heater with integrated hygrostat: +32 to +140 °F (0 to +60 °C)

Wiring diagram

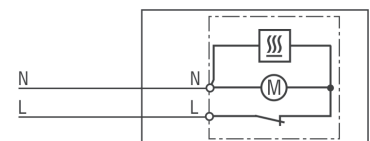

Part No.	Heating capacity	Operating voltage	Setting range ²	Approvals
03051.0-00	950 W	AC 230 V, 50/60 Hz	0 to 60 °C	UL File No. E234324, VDE, GOST TR
03051.0-02	950 W	AC 230 V, 50/60 Hz	65 %RH, factory-set	UL File No. E234324, VDE, GOST TR
03051.0-07	950 W	AC 230 V, 50/60 Hz	none (no integrated controls)	UL File No. E234324, VDE, GOST TR
03059.9-00	950 W	AC 120 V, 50/60 Hz	32 to 140 °F	UL File No. E234324, -, GOST TR
03059.9-02	950 W	AC 120 V, 50/60 Hz	none (no integrated controls)	UL File No. E234324, -, GOST TR

² Switching difference 12.6 °F ± 7 °F tolerance (7 K ± 4 K)

08.08.2014 | Specifications are subject to change without notice. Suitability of this product for its intended use and any associated risks must be determined by the end customer/buyer in its final application.